

Swidget™ Wi-Fi Control + Power Out Light Insert

The Swidget Platform is a modular Smart Home enabled system comprised of Wall Switches and Outlets. The modularity of the base devices allows for easy after-market installation of a Swidget Insert that can enable the wireless control and independent power monitoring of the receptacle, in addition to providing other sought-after functions like sensors, speakers or lighting.


FEATURES

Wi-Fi

- Wi-Fi 2.4GHz
- User replaceable – electrician not required
- Independent power monitoring
- Works with Amazon Alexa, Google Assistant and IFTTT*
- Regular OTA upgrades to expand the capabilities

Power Out Light

- Automatic emergency lighting when the power goes out
- Up to 1 hour of illumination – no batteries required
- High Efficiency LED
- Charges up to 80% in five minutes

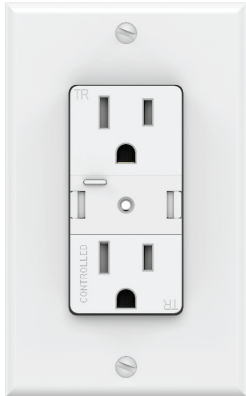

DESCRIPTION

The Swidget product line has been developed to support the easy integration of Home Automation and Smart Home markets with unique and flexible solutions. Designed to be integrated into all major Smart Home protocols, the Swidget Wi-Fi Power Out Light provides dual functions. The Wi-Fi connectivity transforms the Swidget device into a Wi-Fi enabled smart device.

Using the free Swidget App (available for Android and iOS), unlock your Swidget device to perform any number of tasks:

- Power On/Off your outlet
- Monitor your energy consumption
- Schedule devices to conserve energy
- Set multiple automatic notifications including when your power consumption is too high

The Power Out Light addition provides LED based illumination when the power goes out. Utilizing high efficient LED output and an energy storage design that does not require batteries, this light will illuminate for up to 1 hour on a full charge.

As all Swidget Inserts operate on the Class 2 certified interface, an electrician is NOT required for installation or removal.

SPECIFICATIONS

Product Number	WI003UWA
Wireless Standard	Wifi 802.11g
Wireless Band	2.4GHz
Device Compatibility	Amazon Alexa, Google Assistant and IFTTT*
Device Upgrades	OTA
LED Intensity Specification	1900mcd@20mA
Operation	Automated illumination at loss of power

Max Run Time	1 hour
Charge Times	20%@5min, 80%@60min
Environmental	Indoor installation only
Operating Temperature	14F to 104F (-10C to 40C)

REVISION HISTORY

Revision Number	Date	Comment
000	2019/09/27	Initial release

**3rd party integrations are controlled and managed by external service providers. Swidget makes no warranty that these services will continue to exist or be supported over the full life of the product.*

SALES

Corporate Office
6-677 Innovation Drive
Kingston, ON K7K 7E6
<https://www.swidget.com>