

ETZG-53-WT, ETZG-53-WT/R35, ETZG-53-BK, ETZG-53-BK/R35,

## **SPECIFICATION**

- STAINLESS STEEL SHOWER COLUMN, GRADE #304
- 6MM THICK TEMPERED GLASS FACING
- PRESSURE BALANCED VALVE
- 3 FUNCTIONS DIVERTER VALVE WITH HALF ZONES
- ASSEMBLED WITH PVC HOSES
- SUPPLIED WITH 1/2" HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- Pressure: Minimum 25 psi, maximum 80 psi
- ½" CONNECTION

## **AVAILABLE OPTION**

- ADDITION OF A DIVERTER SPOUT (REF. MODEL ETZG-53/R35)

#### **AVAILABLE FINISH**

- ETZG-53-WT: TEMPERED GLASS, WHITE FINISH
- ETZG-53-BK: TEMPERED GLASS, BLACK FINISH

### **ACCESSORIES**

Accessories	ETZG-53-WT	ETZG-53-WT/R35	ETZG-53-BK	ETZG-53-BK/R35
SHOWER HEAD	PVTS-09-S	PVTS-09-S	PVTS-09-S	PVTS-09-S
HAND SHOWER	HS-210	HS-210	HS-210	HS-210
SUPPORT	HSH-103-70	HSH-103-70	HSH-103-70	HSH-103-70
Hose	SSH-150	SSH-150	SSH-150	SSH-150
DIVERTER SPOUT	HC-105	R-35	HC-105	R-35


# **FLOW RATE**

Pressure balanced valve	24 L/MIN [7.9 GPM] @ 60 PSI		
Shower head	9.5 L/мін [2.5 gpм] @ 60 psi		
HAND SHOWER	9.5 L/MIN [2.5 GPM] @ 60 PSI		
JETS (4)	12.1 L/MIN [3.2 GPM] @ 60 PSI		
DIVERTER SPOUT	17 L/MIN [4.5 GPM] @ 60 PSI		
SPOUT	19.7 L/MIN [5.2 GPM] @ 60 PSI		

## WARRANTY

PRODUCTS COVERED BY A 5-YEAR WARRANTY AGAINST ALL MANUFACTURING DEFECTS.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

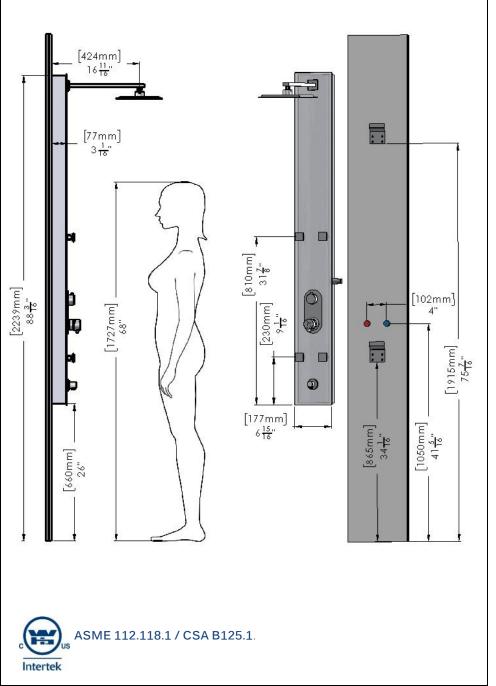

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

Rev.: 02/2018